




# AMERICAN NTN BEARING LTD

## INA LASE20-N bearing units

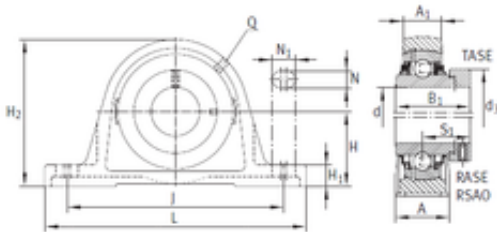

LASE20-N Bearing 2D drawings and 3D CAD models

Bearing No. LASE20-N

Bore Diameter	20 mm
d	20 mm
S1	26,6 mm
Thread (Q)	Rp1/8
d3	33 mm
A	32 mm
A1	19 mm
B1	43,7 mm
H	33,3 mm
H1	14,5 mm
H2	64 mm
J	97 mm
L	130 mm
N	11 mm
N1	19 mm
Weight	0,63 Kg
Basic dynamic load rating (C)	12,8 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.874
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



## AMERICAN NTN BEARING LTD

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE20KLLHB
Seals	Double Non Contact Labyrinth
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row   Radial   Standard Shaft Height   Extended Inner Race   Metric   With Set Screw
Long Description	2 Bolt Pillow Block; 20MM Bore; 33.3MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 87MM Minimum Bolt Spacing; 105MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Non Contact
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	<a href="http://www.ina.com">http://www.ina.com</a>
Manufacturer Item Number	LASE20
Weight / LBS	1.323
Bore	0.787 Inch   20 Millimeter
Bolt Spacing Minimum	3.425 Inch   87Millimeter
Length Thru Bore	1.72 Inch   43.7 Millimeter
Base to Center Height	1.311 Inch   33.3 Millimeter
Nominal Bolt Center to Center	3.8 Inch   97 Millimeter



## AMERICAN NTN BEARING LTD

Bolt Spacing Maximum	4.134 Inch   105Millimeter
----------------------	----------------------------